

Pushrod for TC-88




“Elevator” Tappet Set raises the lifter top for better pushrod angle of travel.

VT No.	Item
10-0786	Lifters
11-0843	Pushrods
11-1067	Cover Set
11-0865	Kit

S&S TC-88 Adjustable Pushrods and Cover Kit. Chrome-moly pushrods feature simple trouble-free installation that does not require the removal of gas tank or rocker assemblies. Includes pushrods, gaskets, O-rings, retainer clips and upper pushrod covers that have been designed to provide a more stable and rigid cover assembly.

VT No.	Item
11-7715	Kit
11-7716	Pushrods Only

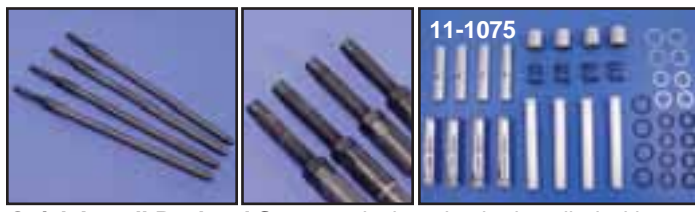

Quick Install Pushrod Sets are designed to be installed without removal of rocker boxes or cylinder heads. Precision made from 4130 chromemoly tubing. Fits TC-88.

VT No.	Brand
11-9708	Sifton
11-9713	ET
11-8522	VT
11-1075	Cover Set



V-Thunder Big Twin Pushrod Kits are made from .049 wall 4130 chromemoly steel tubing. Exacting tolerances for reliability. VT No. 11-7712 is a 2-piece style which can be removed or installed without disassembling heads. These rods fit stock or Velva Touch Lifter units.

VT No. 11-7013* 2000-up TC-88 with Stock Blocks

***Note:** Saves time without the disassembling of the heads or lifter blocks.



Performance Pushrod Sets for TC-88 are E-Z install type are designed to be installed without removal of the heads or rocker boxes. Rods feature chromemoly tube construction with rolled thread adjusters. Both kits include pushrod tubes and clips.

VT No.	Brand
11-7714	OE
11-9709	Sifton
11-0866	Cover Set




Taper Lite Adjustable Pushrods are manufactured from alloy with hardened adjusters and ball ends. Designed to be installed without removing gas tank, rocker box or camshaft cover. Set of four.

VT No. 11-9706




Andrews Anodized TC-88 EZ Install Pushrods are available in chrome-moly or aluminum. Installation does not require removal of tank or rocker boxes. All are stock diameter, so there is no cover interference.

VT No.	Type
11-2188	Aluminum Pushrods
11-2088	Moly Pushrods



Crane Adjustable Pushrods made from 3/8" aircraft grade seamless 4130 chromemoly steel tubing and heat treated to 128,000 psi tensile strength for a stronger and lighter than stock pushrod. New style adjuster helps minimize the effects of poor rod geometry found in stock pushrods, 3/8" diameter eliminates pushrod "rub" completely. Set contains 2 intake and exhaust pushrods. These are not the time saver type.

VT No. 7132-86



Crane TC-88 Chromemoly Time Saver Adjustable Pushrod Set feature 7/16" diameter tubing, press fit ends that are brazed in, adjustable from 8.750" to 10.750", can be installed using stock pushrod tubes and allows removal of tappet and tappet blocks without motor disassembly.

VT No. 7132-99