




# Brake Disc Bolt

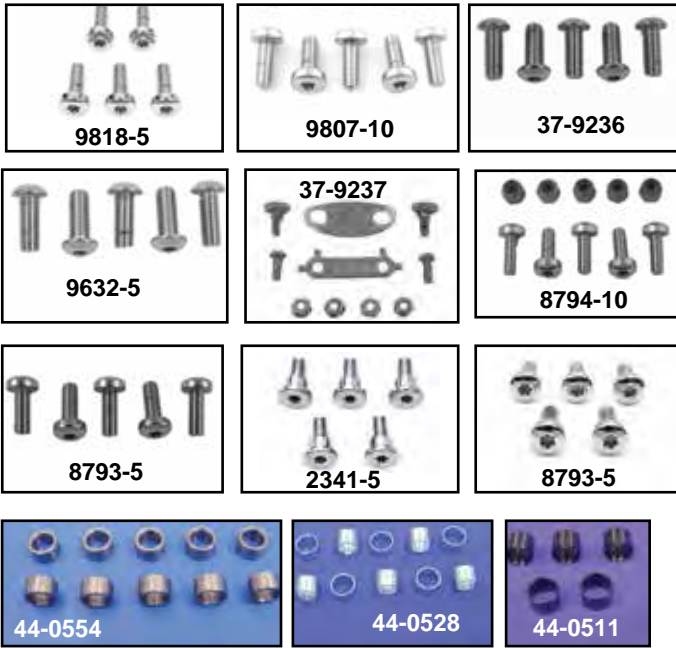

**Chrome Brake Disc Bolts.** See listing for applications.

#	Thread
A	3/8 x 16 x 1
B	5/16 x 18 x 7/8
C	5/16 x 18 x 7/8
D	3/8 x 16 x 1
E	3/8 x 16 x 1

**Chrome Rear Brake Disc Bolts.**

Wheel Type	Year	VT No.	#
<b>FXD</b>			
Cast	1997-up	<b>9818-5</b>	E
Spoke	1992-up	<b>9807-10</b>	D
<b>FXST-FLST-FXR</b>			
Cast	1979-91	<b>37-9236</b>	A
Cast	1979-91	<b>9632-5</b>	A
Spoke	1993-96	<b>9807-10</b>	D
Spoke	1993-up	<b>37-9237</b>	D
Spoke	1997-up	<b>9818-5</b>	E

**Chrome Front Disc Brake Disc Bolts.**

Wheel Type	Disc	Year	VT No.	#
<b>FXST-FXDWG</b>				
Spoke	Single	1984-up	<b>8794-10</b>	B
Cast	Single/Dual	1984-up	<b>8793-5</b>	C
<b>FXR-FXD</b>				
Spoke/Cast	Single/Dual	2006-up	<b>2341-5</b>	C
Spoke/Cast	Single/Dual	1984-up	<b>8793-5</b>	C

**Brake Disc Bolt Spacers** will adapt 1973-up FX-FL rear hubs to accept brake discs for front fork use. VT No. 44-0528 fits dual disc type 1980-83 FXWG type.

VT No.	Outer	Inner
<b>44-0528</b>	3/8	5/16
<b>44-0511</b>	7/16	3/8
<b>44-0554</b>	7/16	5/16

# Brake Disc-Pulley Spacers



**2000-up Rear Pulley-Disc Spacers**, sold as each.

VT No.	Thick	Type	VT No.	Thick	Type
<b>20-0346</b>	1/16"	Steel	<b>20-0143</b>	.750"	Alloy
<b>20-0347</b>	.125"	Steel	<b>20-0145</b>	1"	Alloy
<b>20-0343</b>	.200"	Steel	<b>20-0146</b>	1 3/8"	Alloy
<b>20-0344</b>	.250"	Steel	<b>20-0147</b>	1.5"	Alloy
<b>20-0345</b>	.300"	Steel			



**Brake Disc Spacers** provide offset when required, with 7/16" bolt holes. Each disc measures 2 1/16" inner diameter with 4 5/16" outside diameter.

**Fits 1980-99 with 2 1/16" I.D.**

VT No.	Thick	Material
<b>23-0320*</b>	1/16"	Steel
<b>19-0128</b>	3/16"	Steel
<b>19-0452</b>	3/16"	Billet
<b>19-0413</b>	1/4"	Steel

**\*Note:** Use when installing flat brake disc on 1973-75 Big Twin.

**Alloy Rear Pulley Rotor Spacer** is ideal to get belt pulleys or chain sprockets in line. These spacers can also be used as a disc spacer. Spacer can be machined down to the next size under without having to worry about the spigot alignment, when you machine the face of the spacer down to the desired thickness. Spacers are drilled for use with 7/16" bolts and designed to be used with 2000-up type wheel hubs.



**Aluminum Rear Pulley Spacer**  
**Fits 2000-up with 2.25" I.D.**

VT No.	Thick
<b>20-0149</b>	.200"
<b>20-0150</b>	.125"
<b>20-0151</b>	.3125"
<b>20-0136</b>	.250"
<b>20-0143</b>	.300"
<b>20-0144</b>	.940"
<b>20-3088</b>	1"
<b>20-0146</b>	1.250"
<b>20-3090</b>	1.370"
<b>20-0147</b>	1.5"